


RIVETKING® COLLAR BOLT FIXED GRIP

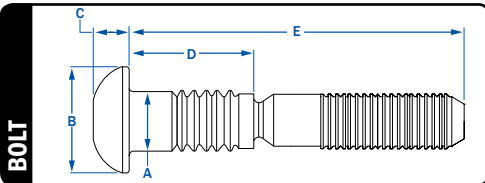


COLLAR BOLT

Industrial Rivet's part numbers are made up of six elements which, when correctly designated, completely describe the desired rivet.

SAMPLE PART NUMBER

CBC6LT - R6 - 2G



| NOM. BODY DIA. | PART NUMBER | | | | | GRIP RANGE | | NOTCH LENGTH | OVERALL LENGTH | MAX HOLE SIZE |
|----------------|-------------|-------|----------|----------|---------|------------|---------|--------------|----------------|---------------|
| | CATEGORY | HEAD | MATERIAL | DIA-GRIP | PLATING | MIN. | MAX. | | | |
| 3/16" | CBC6L | T | R | 6 - 2 | G | 0.063 | - 0.188 | 0.394 | 1.404 | 0.203 |
| | CBC6L | T | R | 6 - 3 | G | 0.125 | - 0.250 | 0.457 | 1.466 | |
| | CBC6L | T | R | 6 - 4 | G | 0.188 | - 0.313 | 0.519 | 1.529 | |
| | CBC6L | T | R | 6 - 5 | G | 0.250 | - 0.375 | 0.582 | 1.591 | |
| | CBC6L | T | R | 6 - 6 | G | 0.313 | - 0.438 | 0.644 | 1.654 | |
| | CBC6L | T | R | 6 - 7 | G | 0.375 | - 0.500 | 0.707 | 1.716 | |
| | CBC6L | T | R | 6 - 8 | G | 0.438 | - 0.563 | 0.769 | 1.779 | |
| | CBC6L | T | R | 6 - 9 | G | 0.500 | - 0.625 | 0.832 | 1.841 | |
| | CBC6L | T | R | 6 - 10 | G | 0.563 | - 0.688 | 0.894 | 1.904 | |
| | CBC6L | T | R | 6 - 11 | G | 0.625 | - 0.750 | 0.957 | 1.966 | |
| | CBC6L | T | R | 6 - 12 | G | 0.688 | - 0.813 | 1.019 | 2.029 | |
| | CBC6L | T | R | 6 - 13 | G | 0.750 | - 0.875 | 1.082 | 2.091 | |
| | CBC6L | T | R | 6 - 14 | G | 0.813 | - 0.938 | 1.144 | 2.154 | |
| | CBC6L | T | R | 6 - 15 | G | 0.875 | - 1.000 | 1.207 | 2.216 | |
| | CBC6L | T | R | 6 - 16 | G | 0.938 | - 1.063 | 1.269 | 2.279 | |
| | 1/4" | CBC6L | T | R | 6 - 17 | G | 1.000 | - 1.125 | 1.332 | |
| CBC6L | | T | R | 6 - 18 | G | 1.063 | - 1.188 | 1.394 | 2.404 | |
| CBC6L | | T | R | 6 - 19 | G | 1.125 | - 1.250 | 1.457 | 2.466 | |
| CBC6L | | T | R | 6 - 20 | G | 1.188 | - 1.313 | 1.519 | 2.529 | |
| CBC6L | | T | R | 8 - 2 | G | 0.063 | - 0.188 | 0.485 | 1.520 | |
| CBC6L | | T | R | 8 - 3 | G | 0.125 | - 0.250 | 0.548 | 1.583 | |
| CBC6L | | T | R | 8 - 4 | G | 0.188 | - 0.313 | 0.610 | 1.645 | |
| CBC6L | | T | R | 8 - 5 | G | 0.250 | - 0.375 | 0.673 | 1.708 | |
| CBC6L | | T | R | 8 - 6 | G | 0.313 | - 0.438 | 0.735 | 1.770 | |
| CBC6L | | T | R | 8 - 7 | G | 0.375 | - 0.500 | 0.798 | 1.833 | |
| CBC6L | | T | R | 8 - 8 | G | 0.438 | - 0.563 | 0.860 | 1.895 | |
| CBC6L | | T | R | 8 - 9 | G | 0.500 | - 0.625 | 0.923 | 1.958 | |
| CBC6L | | T | R | 8 - 10 | G | 0.563 | - 0.688 | 0.985 | 2.020 | |
| CBC6L | | T | R | 8 - 11 | G | 0.625 | - 0.750 | 1.048 | 2.083 | |
| CBC6L | | T | R | 8 - 12 | G | 0.688 | - 0.813 | 1.110 | 2.145 | |
| 5/16" | | CBC6L | T | R | 8 - 13 | G | 0.750 | - 0.875 | 1.173 | 2.208 |
| | CBC6L | T | R | 8 - 14 | G | 0.813 | - 0.938 | 1.235 | 2.270 | |
| | CBC6L | T | R | 8 - 15 | G | 0.875 | - 1.000 | 1.298 | 2.333 | |
| | CBC6L | T | R | 8 - 16 | G | 0.938 | - 1.063 | 1.360 | 2.395 | |
| | CBC6L | T | R | 8 - 17 | G | 1.000 | - 1.125 | 1.423 | 2.458 | |
| | CBC6L | T | R | 8 - 18 | G | 1.063 | - 1.188 | 1.485 | 2.520 | |
| | CBC6L | T | R | 8 - 19 | G | 1.125 | - 1.250 | 1.548 | 2.583 | |
| | CBC6L | T | R | 8 - 20 | G | 1.188 | - 1.313 | 1.610 | 2.645 | |
| | CBC6L | T | R | 10 - 4 | G | 0.125 | - 0.375 | 0.749 | 1.910 | |
| | CBC6L | T | R | 10 - 6 | G | 0.250 | - 0.500 | 0.874 | 2.035 | |
| | CBC6L | T | R | 10 - 8 | G | 0.375 | - 0.625 | 0.999 | 2.160 | |
| | CBC6L | T | R | 10 - 10 | G | 0.500 | - 0.750 | 1.124 | 2.285 | |
| | CBC6L | T | R | 10 - 12 | G | 0.625 | - 0.875 | 1.249 | 2.410 | |
| | CBC6L | T | R | 10 - 14 | G | 0.750 | - 1.000 | 1.374 | 2.535 | |
| | CBC6L | T | R | 10 - 16 | G | 0.875 | - 1.125 | 1.499 | 2.660 | |
| | CBC6L | T | R | 10 - 18 | G | 1.000 | - 1.250 | 1.624 | 2.785 | |
| 3/8" | CBC6L | T | R | 10 - 20 | G | 1.125 | - 1.375 | 1.749 | 2.910 | |
| | CBC6L | T | R | 12 - 4 | G | 0.125 | - 0.375 | 0.934 | 2.246 | |
| | CBC6L | T | R | 12 - 6 | G | 0.250 | - 0.500 | 0.934 | 2.246 | |
| | CBC6L | T | R | 12 - 8 | G | 0.375 | - 0.625 | 1.059 | 2.371 | |
| | CBC6L | T | R | 12 - 10 | G | 0.500 | - 0.750 | 1.184 | 2.496 | |
| | CBC6L | T | R | 12 - 12 | G | 0.625 | - 0.875 | 1.309 | 2.621 | |
| | CBC6L | T | R | 12 - 14 | G | 0.750 | - 1.000 | 1.434 | 2.746 | |
| | CBC6L | T | R | 12 - 16 | G | 0.875 | - 1.125 | 1.559 | 2.871 | |
| CBC6L | T | R | 12 - 18 | G | 1.000 | - 1.250 | 1.684 | 2.996 | | |
| CBC6L | T | R | 12 - 20 | G | 1.125 | - 1.375 | 1.809 | 3.121 | | |

